



## Glass Chiller

High Performance Remote Glass Chillers

Essential for bar, restaurant and club - the glass chiller is designed to rapidly chill glasses straight from the glass washer.

### 冻杯柜

高性能的分体冻杯柜

适用于酒吧及各类型餐厅-可直接从洗杯机取出后，随即放进冻杯柜内，快速冷却

### 特性及优点

- 采用坚硬不锈钢外壳及内胆
- 双层氩气涂层玻璃自动关合门，可保持准确温度及附有易于清洁和更换的球状磁性门封
- 采用先进科技的制冷系统；可承受32°C外界温度
- 适用于标准400mm X 400mm 杯酋
- 机械升降调较杯酋之位置，可满足各种玻璃杯之尺寸
- 分体式制冷系统
- 环保型零ODP泡沫隔冷层
- 自动溶雪功能，1°C以上吹风式，1°C以下，可电热溶雪功能
- 门框装置防潮发热线
- 配备蒸发器、温度调节装置、膨胀阀及冷凝排水口
- 符合HACCP国际卫生标准



## Glass Chiller

### Features & Benefits

- Tough, durable stainless steel exterior and interior
- Excellent anti-condensation lockable self closing double glazed Argon gas doors with easy to clean and replace magnetic balloon gasket
- Advanced refrigeration system ensures energy efficient and effective performance in 32°C ambient environments
- Accommodate 400 x 400 mm glass rack
- Gravity fed lifting mechanism which will accommodate most glass sizes
- Remote refrigeration system
- Environmentally friendly ODP Zero (Ozone Depletion Potential) foam insulation for excellent thermal efficiency and performance
- Automatic defrost - off cycle above +1°C, electric below +1°C
- Anti condensation heaters fitted to door mullions
- Supplied with evaporator, thermostat, expansion valve, condensate to drain
- HACCP compliant




Dimensions 尺寸: Ext 外围尺寸: W800/1395 x D600 x H850 mm Int. 内围尺寸: W515/(515 X 2) x D500 x H652

Model 型号	Door 门	Temp°C 温度	HP 匹数	Voltage 电压	Amps 安培	CFC Free Refrigerant 雪种	#Capacity容量 (400 x 400 mm glass rack)
WGC1RSL	1	+3/+10	1/4	220V/1PH	3	R134a	2
WGC2RSL	2	+3/+10	3/8	220V/1PH	4.5	R134a	4

#Not include glass rack 不包括杯茜

Should be connected within 5 M 须安装于5M范围内

Drain through floor for wash out facility 须要做去水位

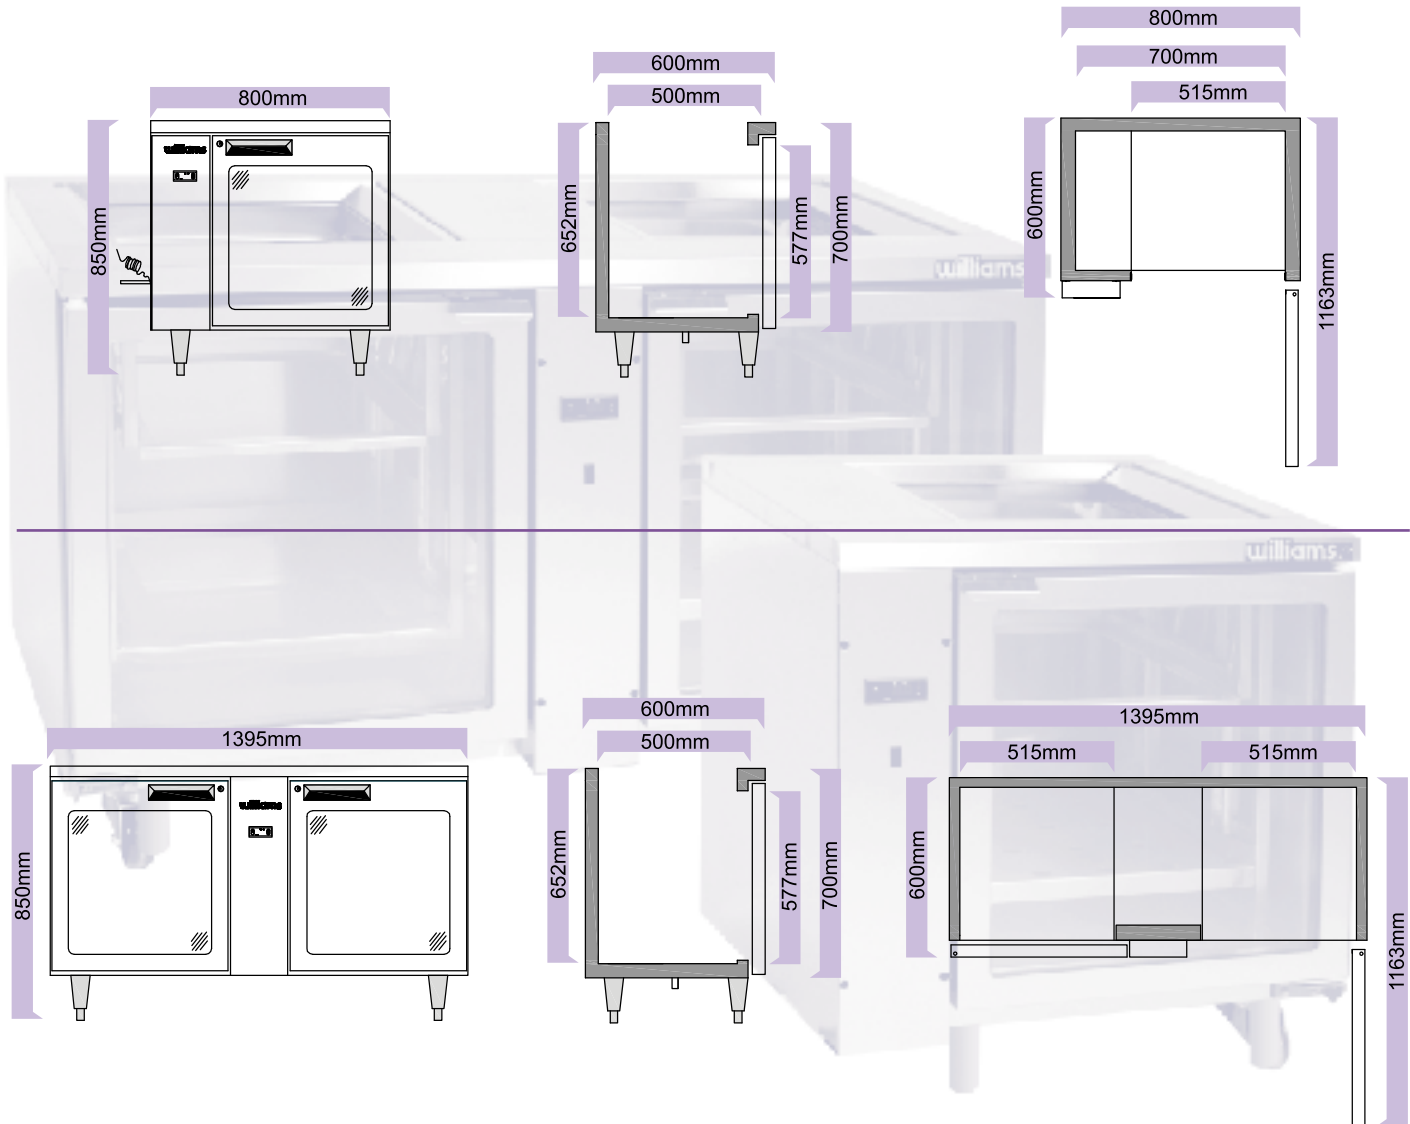

As part of our commitment to ongoing product development, specifications may be subject to change without prior notice. Installation of all counters and cabinets requires adequate ventilation.

规格如有更改恕不另行通知  
所有冰箱及冰柜需要安装在良好通风处

[www.williams-refrigeration.com](http://www.williams-refrigeration.com)

## Williams Refrigeration

**Hong Kong:**  
4A Harrington Bldg, 36-50 Wang Wo Tsai Street., Tsuen Wan, Hong Kong  
Tel: (852) 2407-5422 Fax: (852) 2407-3767 e-mail: mfco@williams-hongkong.com

**Beijing:**  
Rm 116, Blk 16, Section 7, He Ping Li, Dongcheng District, Beijing, China (Zip:100013)  
Tel: (86) 010-6428-8493 Fax: (86) 010-6428-4979 e-mail: ssong@williams-beijing.com

**Dongguan (Factory):**  
Gin Kao Industry Estate, Qing Xi Town, Dongguan City,  
Guangdong Province, China (Zip:523653)  
Tel: (86) 769-8773-7208  
Fax: (86) 769-8773-7209  
e-mail: info@williams-china.com  
<http://www.williams-hongkong.com>

**Shanghai:**  
Rm 1307, 13/F., No 2088 Hua Shan Road, Hui Yin Plaza, South Bldg, Shanghai, China (Zip: 200030)  
Tel: (86) 021-5407-0482 / 0462 Fax: (86) 021-5407-0472 e-mail: sales.service@williams-shanghai.com

**Dubai**  
Rm 1801/5, 18/F., Crown Plaza Commercial Bldg., Sheikh Zayed Rd., PO Box 118669, Dubai, UAE  
Tel: (971) 4329-1082 Fax: (971) 4332-8860 e-mail: gcoffey@williams-dubai.com



FOODSERVICE EQUIPMENT

