



ARTEMIS CO., LTD.

Phone: (+86) 189-3337-8658

E-mail: marketing@royal-kincool.com

Web: www.royal-kincool.com

13 JINJING ER ROAD, DURUAN TOWN,
JIANGMEN CITY, GUANGDONG, CHINA

The image and technical data in this catalogue is
for reference only. ARTEMIS CO., LTD.
reserves the right of final interpretation.


Royal Kincool

CATALOG.
2025

DRINKING MACHINERY

ARTEMIS CO., LTD.



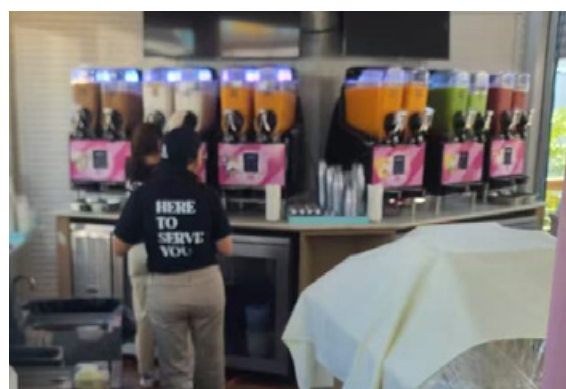



03

Luxury Slush Machine
03-08



09

Classic Slush Machine
09-10



11

Juice Dispenser
11-14



15

Hot Chocolate Dispenser
15-16




17

Ice Cream Machine
17-18

Royal
Kincool | SLUSH MACHINE
SERIES

Slush Machine

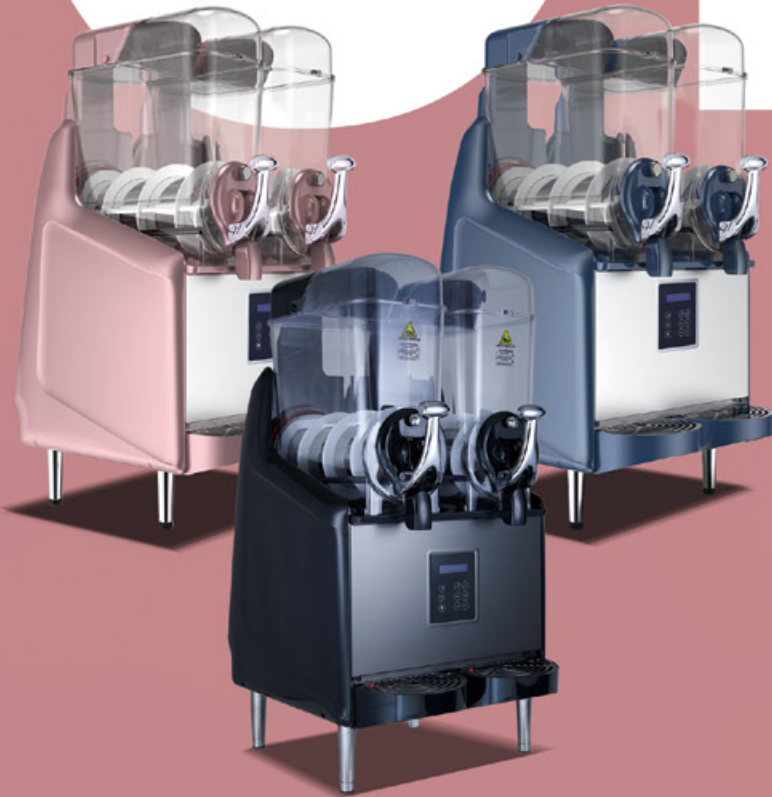

LUXURY SLUSH MACHINE



FEATURES

- Easy – to – use controls include a slush model with consistency control or frozen drinks model with temperature control
- Each bowl is independently controlled, and easy to take off for clean
- Removable spigot, easy to take off and clean
- Low sugar content demand 5% minimum
- Low noise level ≤60 dB
- Adjustable LED light colors, provide the frozen drinks with the optimum attractive display color
- Hot gas defrost for the evaporator cylinder, avoiding freezing block on auger



New Improvements

60↓
%

Approximate **60%** reduction on sugar demand

14↓
%

Approximate **14%** reduction on noise level

COLOUR



BLACK




Model	MODEL X I	Model	MODEL X II	Model	MODEL X III
Temperature (Slush Model)	-2℃ ~ -12℃	Temperature (Slush Model)	-2℃ ~ -12℃	Temperature (Slush Model)	-2℃ ~ -12℃
Temperature (Beverage Model)	1℃~ 7℃	Temperature (Beverage Model)	1℃~ 7℃	Temperature (Beverage Model)	1℃~ 7℃
Ambient Range	5℃ ~ 32℃ Indoors use only	Ambient Range	5℃ ~ 32℃ Indoors use only	Ambient Range	5℃ ~ 32℃ Indoors use only
Capacity (L)	12 x 1	Capacity (L)	12x2	Capacity (L)	12x3
Rated Power (W)	435	Rated Power (W)	765	Rated Power (W)	1218
Voltage (V)	220-240/110	Voltage (V)	220-240/110	Voltage (V)	220-240/110
Frequency (Hz)	50/60	Frequency (Hz)	50/60	Frequency (Hz)	50/60
Refrigerant	R290 / R404a	Refrigerant	R290 / R404a	Refrigerant	R290 / R404a
Dimensions (H)x(W)x(D)(mm)	940 x 280 x 620	Dimensions (H)x(W)x(D)(mm)	940 x 495 x 620	Dimensions (H)x(W)x(D)(mm)	940 x 714 x 620
Packing Sizes (H)x(W)x(D)(mm)	1090 x 350 x 620	Packing Sizes (H)x(W)x(D)(mm)	1090 x 560 x 620	Packing Sizes (H)x(W)x(D)(mm)	1090 x 780 x 620
Net Weight(kg)	35	Net Weight(kg)	57	Net Weight(kg)	78
Gross Weight(kg)	46	Gross Weight(kg)	71	Gross Weight(kg)	95
20FT Container Loading(units)	128	20FT Container Loading(units)	80	20FT Container Loading(units)	62
40FT Container Loading(units)	272	40FT Container Loading(units)	160	40FT Container Loading(units)	120

LUXURY SLUSH MACHINE



FEATURES

- Easy – to – use controls include a slush model with consistency control or frozen drinks model with temperature control
- Each bowl is independently controlled, and easy to take off for clean
- Removable spigot, easy to take off and clean
- Low sugar content demand 5% minimum
- Low noise level ≤60 dB
- Adjustable LED light colors, provide the frozen drinks with the optimum attractive display color
- Hot gas defrost for the evaporator cylinder, avoiding freezing block on auger

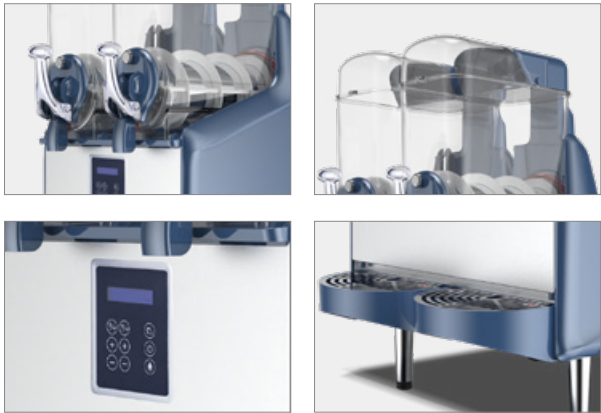

New Improvements

60↓
%

Approximate 60%
reduction on sugar
demand

14↓
%

Approximate 14%
reduction on noise
level

COLOUR



Model	MODEL X I Turbo	Model	MODEL X II Turbo	Model	MODEL X III Turbo
Temperature (Slush Model)	-2°C ~ -12 °C	Temperature (Slush Model)	-2°C ~ -12 °C	Temperature (Slush Model)	-2°C ~ -12 °C
Temperature (Beverage Model)	1°C~ 7 °C	Temperature (Beverage Model)	1°C~ 7 °C	Temperature (Beverage Model)	1°C~ 7 °C
Ambient Range	5 °C ~ 43 °C Outdoors use	Ambient Range	5 °C ~ 43 °C Outdoors use	Ambient Range	5 °C ~ 43 °C Outdoors use
Capacity (L)	12 x 1	Capacity (L)	12 x 2	Capacity (L)	12 x 3
Rated Power (W)	/	Rated Power (W)	/	Rated Power (W)	/
Voltage (V)	220-240/110	Voltage (V)	220-240/110	Voltage (V)	220-240/110
Frequency (Hz)	50/60	Frequency (Hz)	50/60	Frequency (Hz)	50/60
Refrigerant	R290 / R404a	Refrigerant	R290 / R404a	Refrigerant	R290 / R404a
Dimensions (H)x(W)x(D)(mm)	940 x 280 x 610	Dimensions (H)x(W)x(D)(mm)	940 x 495 x 620	Dimensions (H)x(W)x(D)(mm)	940 x 714 x 610
Packing Sizes (H)x(W)x(D)(mm)	1090 x 350 x 620	Packing Sizes (H)x(W)x(D)(mm)	1090 x 560 x 620	Packing Sizes (H)x(W)x(D)(mm)	1090 x 780 x 620
20FT Container Loading(units)	128	20FT Container Loading(units)	80	20FT Container Loading(units)	62
40FT Container Loading(units)	272	40FT Container Loading(units)	160	40FT Container Loading(units)	120



SLUSH MACHINE

CLASSIC SLUSH MACHINE

FEATURES

- High-end and luxurious design, more attractive
- Food grade high density anti-cracking polycarbonate container
- Easy - to -use controls include a slush model with consistency control or frozen drinks model with temperature control
- Each bowl is independently controlled
- High quality metal handle
- LED light illumination
- Drip tray with float indicator
- Removable tank and handle, easy to clean

COLOUR



Model	MyGranita-1S	Model	MyGranita-2S	Model	MyGranita-3S
Temperature	-2°C~ -10°C	Temperature	-2°C~ -10°C	Temperature	-2°C~ -10°C
Capacity(L)	12x1	Capacity(L)	12x2	Capacity(L)	12x3
Rated Power(W)	400	Rated Power(W)	740	Rated Power(W)	1150
Voltage(V)	220-240/110	Voltage(V)	220-240/110	Voltage(V)	220-240/110
Frequency(Hz)	50/60	Frequency(Hz)	50/60	Frequency(Hz)	50/60
Refrigerant	R290 / R134a	Refrigerant	R290 / R404a	Refrigerant	R290 / R404a
Dimensions (H)x(W)x(D)(mm)	810 x 270 x 515	Dimensions (H)x(W)x(D)(mm)	810 x 470 x 515	Dimensions (H)x(W)x(D)(mm)	810 x 670 x 515
Packing Sizes (H)x(W)x(D)(mm)	950 x 350 x 590	Packing Sizes (H)x(W)x(D)(mm)	950 x 550 x 590	Packing Sizes (H)x(W)x(D)(mm)	950 x 750 x 590
Net Weight(kg)	31.9	Net Weight(kg)	50.7	Net Weight(kg)	66.2
Gross Weight(kg)	41.2	Gross Weight(kg)	63.1	Gross Weight(kg)	85.7
20FT Container Loading(units)	128	20FT Container Loading(units)	80	20FT Container Loading(units)	62
40FT Container Loading(units)	272	40FT Container Loading(units)	160	40FT Container Loading(units)	120

Royal
Kincool | JUICE
DISPENSER

JUICE

Dispenser





JUICE DISPENSER

FEATURES

- High transparent, high density anti-cracking polycarbonate bowl
- High quality hermetic compressor with low noise less than 55 db
- Reliable, durable magnetic paddles system, stirring the juice quietly and smoothly, maintaining the best taste of juice. Avoiding the leaking & motor problem caused by the traditional mixing motor (Stirring Type)
- Environment-friendly CFC-free refrigerant R290
- Controlled by digital controller, precisely and individually managing the temperature of each bowl, making sure even cooling, avoiding ice block on the evaporating cylinder once one of the bowls run out
- High-end mirror stainless steel front panel matching different colors of the plastic side panels, lids. (S/S side panels for options)

COLOUR

BLACKYELLOWGREENGREYWHITE



Model	Corolla-1S
Temperature	3℃ ~ 8℃
Capacity(L)	12x1
Rated Power(W)	330
Voltage(V)	220-240/110
Frequency(Hz)	50/60
Refrigerant	R290
Dimensions (H)x(W)x(D) (mm)	640 x 230 x 430
Packing Sizes (H)x(W)x(D) (mm)	720 x 340 x 540
Net Weight (kg)	20
Gross Weight (kg)	22
20FT Container Loading(units)	204
40FT Container Loading(units)	420



Model	Corolla-2S
Temperature	3℃ ~ 8℃
Capacity(L)	12x2
Rated Power(W)	340
Voltage(V)	220-240/110
Frequency(Hz)	50/60
Refrigerant	R290
Dimensions (H)x(W)x(D) (mm)	640 x 430 x 430
Packing Sizes (H)x(W)x(D) (mm)	720 x 540 x 540
Net Weight (kg)	28
Gross Weight (kg)	31
20FT Container Loading(units)	120
40FT Container Loading(units)	264



Model	Corolla-3S
Temperature	3℃ ~ 8℃
Capacity(L)	12x3
Rated Power(W)	510
Voltage(V)	220-240/110
Frequency(Hz)	50/60
Refrigerant	R290
Dimensions (H)x(W)x(D) (mm)	640 x 630 x 430
Packing Sizes (H)x(W)x(D) (mm)	720 x 740 x 540
Net Weight (kg)	36
Gross Weight (kg)	40
20FT Container Loading(units)	90
40FT Container Loading(units)	198



Various hot drinks could be served by Chocofairy, such as hot chocolate, tea, coffee, milk, and mulled wine etc...




HOT CHOCOLATE DISPENSER

FEATURES

- Lovely in design, suitable for varied kinds of stores
- Food-grade high density polycarbonate bowl, easy to remove and clean
- #304 SS Stainless steel water boiler with thermal protector
- Drip tray with indicator warning when full
- Bain-marie heating system, continuous stirring maintains a perfect, lump-free consistency
- Digital thermostat with wide controlled range of temperature from 65°C to 90 °C
- Patented anti-clogging faucet
- Two colors are available : Black and White

COLOUR



New Improvements

Added alarm function for the shortage of water, avoiding heating without water



Model	Chocofairy-5L	Model	Chocofairy-10L
Temperature	85°C	Temperature	85°C
Capacity(L)	5	Capacity(L)	10
Rated Power(W)	1006	Rated Power(W)	1006
Voltage(V)	220-240/110	Voltage(V)	220-240/110
Frequency(Hz)	50/60	Frequency(Hz)	50/60
Dimensions (H)x(W)x(D)(mm)	465 x 280 x 410	Dimensions (H)x(W)x(D)(mm)	580 x 280 x 410
Packing Sizes (H)x(W)x(D)(mm)	525 x 385 x 385	Packing Sizes (H)x(W)x(D)(mm)	645 x 385 x 385
Net Weight(kg)	7.3	Net Weight(kg)	8
Gross Weight(kg)	9.2	Gross Weight(kg)	10.2
20FT Container Loading(units)	360	20FT Container Loading(units)	270
40FT Container Loading(units)	930	40FT Container Loading(units)	744

Ice Cream



Machine



ICE CREAM MACHINE

FEATURES

- Smart control system
- Infrared sensing
- Pasteurization, 14 days clean-free
- Gear type puffing system
- Magnetic stirring device
- Alarm for the shortage of ingredients
- Using the most advanced DD motor technology, instead of gear box
- Independent pre-cool function, managing the temperature under 1°C - 4°C



Model	Model π
Capacity(L)	8*1
Temperature range	-12°C
Climate class	4
Overall Size (W x D x H) (mm)	330 x 900 x 950
Packing Size (W x D x H) (mm)	390 x 960 x 1000
Net Weight (kg)	85
Gross Weight (kg)	100
Voltage (V)	220
Frequency (Hz)	50
Power (W)	2800
Current (A)	13
Compressor (HP)	2001/1/2
Refrigerant Type	R404a
20FT Container Loading (units)	64
40FT Container Loading (units)	132