

150

Soft serve freezer

Single flavour, Taylormate®



Features

Offer all of the popular soft serve variations from low or non-fat ice creams to custards, frozen yogurts and sorbet.

Freezing cylinder

One, 1.4 litre

Hourly production* (approximately)

12.2 litres per hour

Mix hopper

One, 7.6 litre. Separate hopper refrigeration to maintains the mix below 5°C during Auto and Standby modes.

Indicator light

'Mix Low' light alerts the operator to add mix.

Solid state controls

Taylor Quality Control precisely monitors viscosity to maintain consistent quality.


Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

Two locking casters

Front casters have a locking feature for operators to keep equipment in place. The lock can be released to move the equipment for cleaning.

150 Soft serve freezer

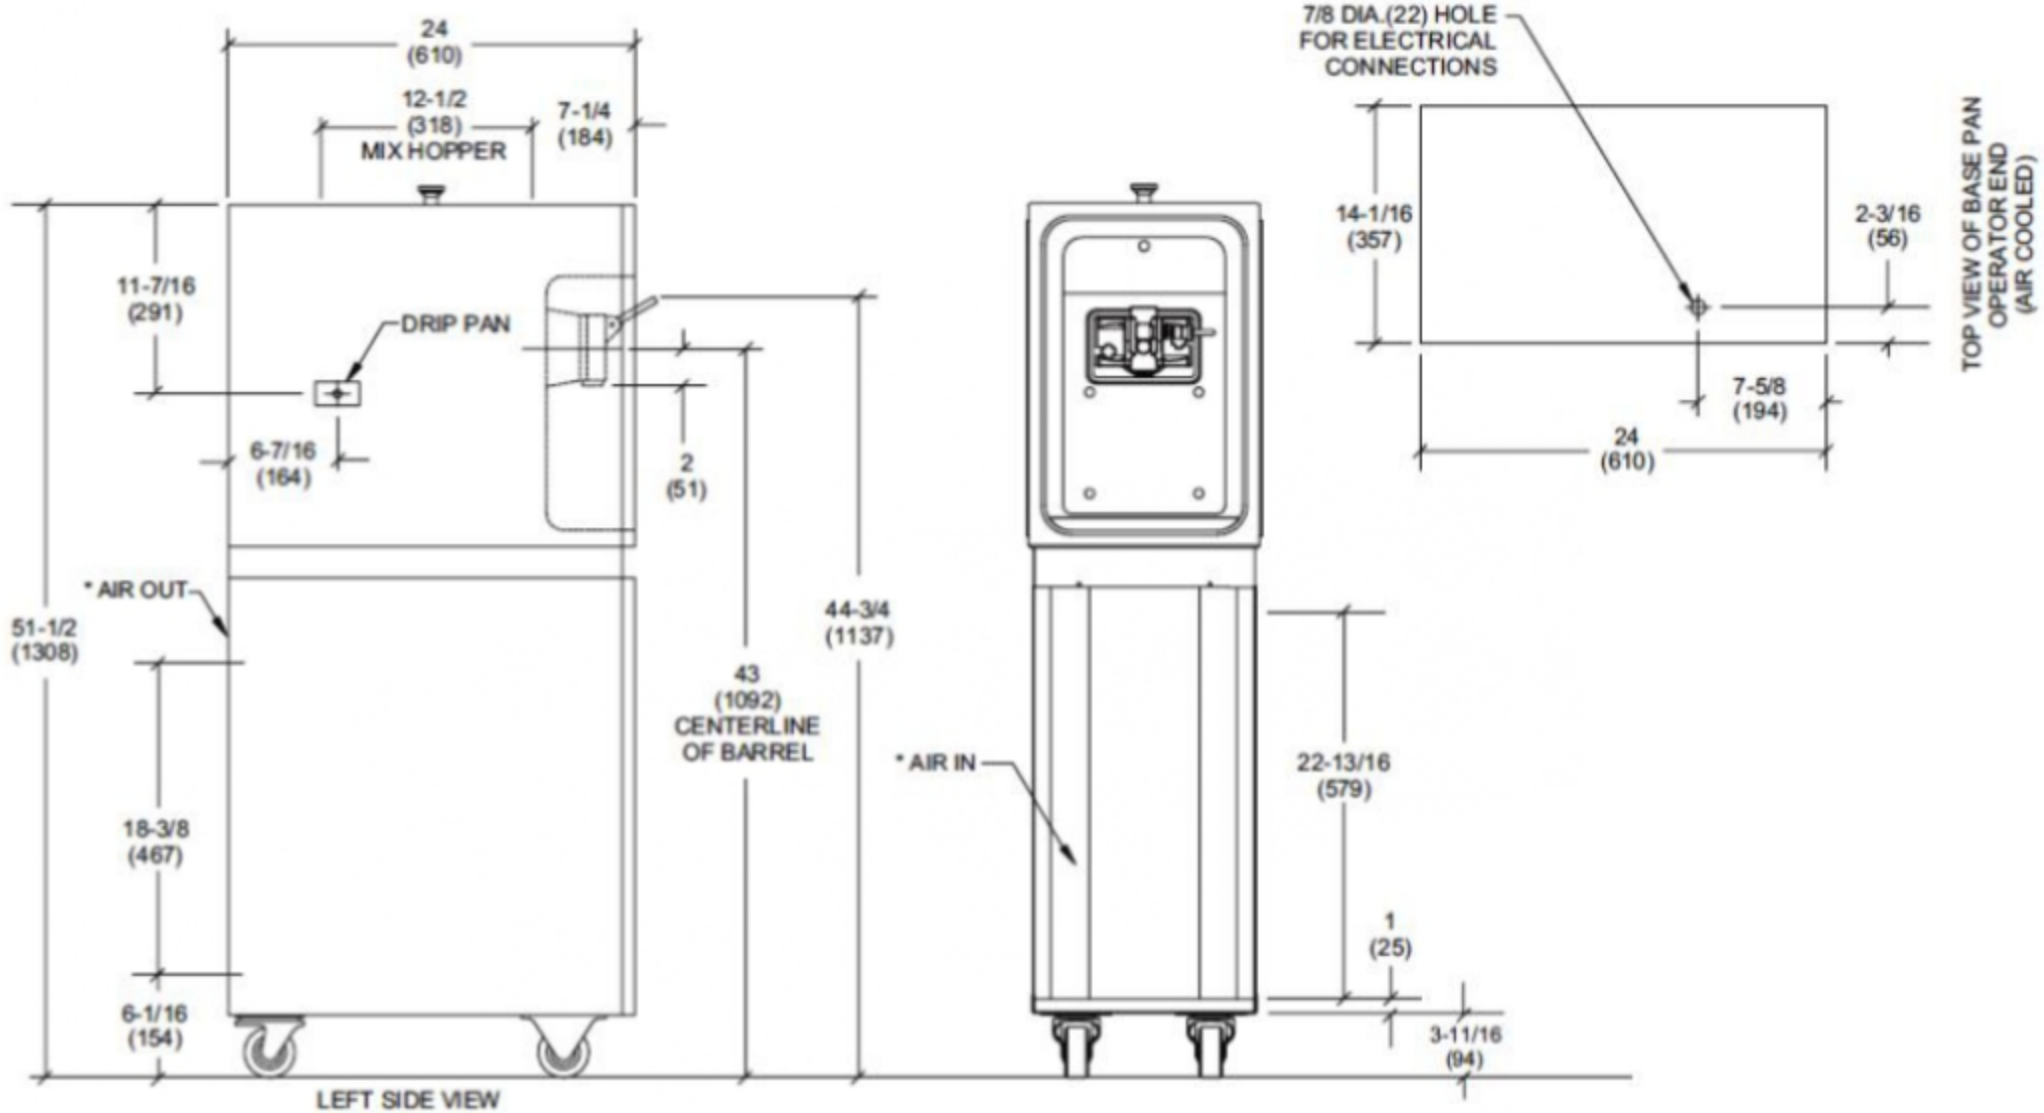

Figures in brackets indicate millimetres

NOTE: * (AIR COOLED ONLY)

| DIMENSIONS | | |
|--------------------------------------|--------------|---------|
| Height | 51.50" | 1308 mm |
| Width | 14.63" | 357 mm |
| Depth | 24" | 610 mm |
| Floor clearance* | 3.69" | 94 mm |
| *Mounted on standard castors | | |
| Weight | 250 lbs. | 114 Kg |
| Wall air clearance (minimum)* | | |
| Back | - | - |
| Sides | 6" | 152 mm |
| Technical specification | | |
| Beater motor | 0.5 HP | |
| Refrigeration (freezer) | 3,000 BTU/hr | R404A |
| Refrigeration (hopper) | 400 BTU/hr | R134a |

| ELECTRICAL SPECIFICATION - SINGLE PHASE | | |
|---|-------------------------|--|
| Taylor 150 | | |
| Voltage | 230 VAC | |
| Frequency | 50 Hz | |
| Circuit breaker | 13 amp fuse | |
| Plug/Socket | 13 amp dedicated socket | |

Optional extras

- Cone dispenser

The Taylor 150 is ONLY available AIR cooled.

*Minimum air clearances MUST be met to assure adequate airflow for optimum performance of air cooled machines. Install the skirt provided on the right side of the unit and place the back of the unit against a wall to prevent recirculation of warm air.



Standard 6



LISTED
SA2650



Selected 50
Hz. Models